

S4

Metric

FRAME SIZE LIMITS

Single | Double | Combination

centor®

			Single	Double	Combination
Fabric Type	Inside Outside	Frame Height (mm) (FH)	Frame Width (mm) (FW)		
Standard weave	I / O	815 - 4000	1015 - 4611	1015 - 9013	1015 - 4676
Tight weave	I / O	815 - 4000	1015 - 4197	1015 - 8185	1015 - 4262
Boston, Blockout	I	815 - 2900	1015 - 2532	1015 - 4855	1015 - 2597
Boston, Light-filtering	I	815 - 2900	1015 - 4197	1015 - 8185	1015 - 4262
Tuscany, Blockout	I	815 - 2900	1015 - 2740	1015 - 5271	1015 - 2805
Tuscany, Light-filtering	I	815 - 2900	1015 - 4197	1015 - 8185	1015 - 4262
Mercury, Blockout	I	815 - 2900	1015 - 3161	1015 - 6113	1015 - 3226
Mercury, Light-filtering	I	815 - 2900	1015 - 4197	1015 - 8185	1015 - 4262
Sun-filter	I / O	815 - 3200	1015 - 4543	1015 - 8877	1015 - 4608

Fabric widths are determined by fabric thickness. Due to variations in thickness, the maximum width may not always be achievable. In such cases, we will offer an alternative colour and fabric type. All screens over 5910mm will require frame joiners at the head and sill. The dimensions are a guide only and may change depending on the options selected. Confirmation should always be sought from a Centor Screen dealer with access to the Centor Production System (CPS).

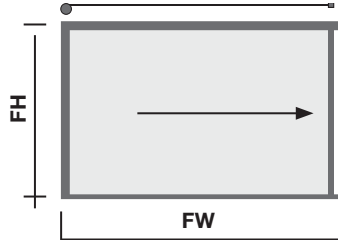
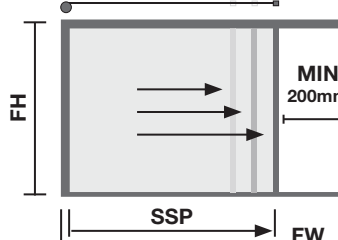
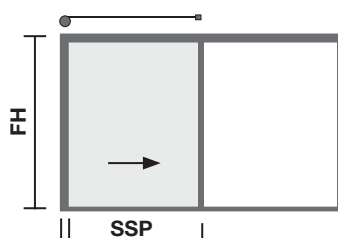
S4

Metric

FRAME SIZE LIMITS

Jambless | XO or OX

centor®

	Configuration	Fabric Type	Inside Outside	Frame Height (mm) (FH)	Frame Width (mm) (FW)	Screen Stop Position (SSP)
Jambless (Full width)		Standard weave	I / O	815 - 4000	913 - 4528	Minimum 15mm from end Use side seal or magnet adaptor
		Tight weave	I / O	815 - 4000	913 - 4108	
		Sun-filter	I / O	815 - 3200	913 - 4452	
Jambless (Custom)		Standard weave	I / O	815 - 4000	913 - 10209	300 - 4409
		Tight weave	I / O	815 - 4000	913 - 9795	300 - 3989
		Sun-filter	I / O	815 - 3200	913 - 10141	300 - 4333
XO or OX		Standard weave	I / O	815 - 4000	1015 - 10311	300 - 4409
		Tight weave	I / O	815 - 4000	1015 - 9897	300 - 3989
		Sun-filter	I / O	815 - 3200	913 - 10243	300 - 4333

Fabric widths are determined by fabric thickness. Due to variations in thickness, the maximum width may not always be achievable. In such cases, we will offer an alternative colour and fabric type. All screens over 5910mm will require frame joiners at the head and sill. The dimensions are a guide only and may change depending on the options selected. Confirmation should always be sought from a Centor Screen dealer with access to the Centor Production System (CPS).

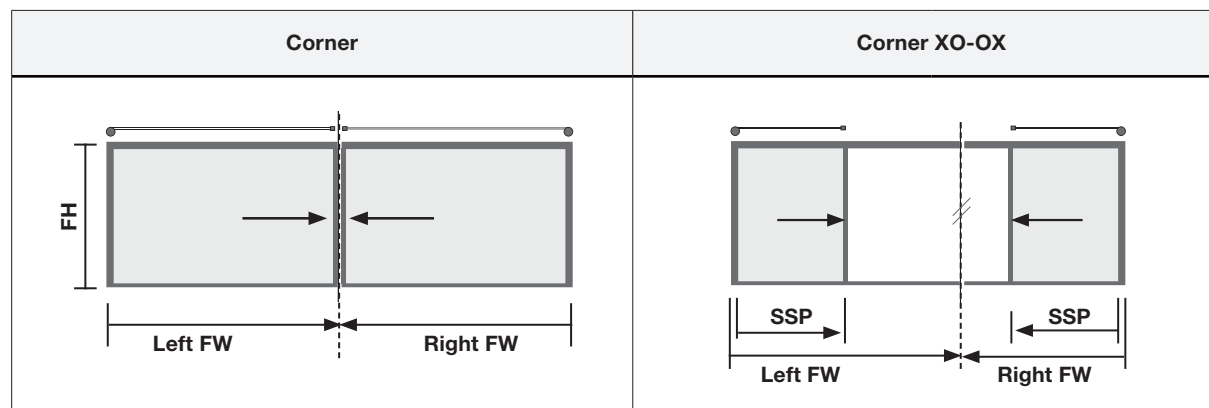
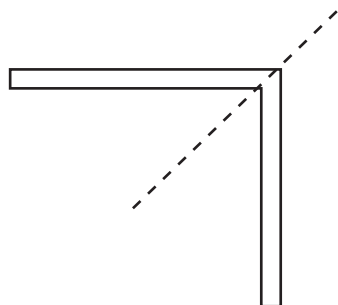
S4

Metric

FRAME SIZE LIMITS

Corner | Corner XO-OX

centor®



Fabric Type	Inside Outside	Frame Height (mm) (FH)	Frame Width (mm) (FW)		Screen Stop Position (SSP)
Standard weave	I / O	815 - 3200	910 - 4591	1061 - 9794	300 - 4409
Tight weave	I / O	815 - 3200	910 - 4177	1061 - 9794	300 - 3989
Boston, Blockout	I	815 - 2900	910 - 2512	~	~
Boston, Light-filtering	I	815 - 2900	910 - 4177	~	~
Tuscany, Blockout	I	815 - 2900	910 - 2720	~	~
Tuscany, Light-filtering	I	815 - 2900	910 - 4177	~	~
Mercury, Blockout	I	815 - 2900	910 - 3141	~	~
Mercury, Light-filtering	I	815 - 2900	910 - 4177	~	~
Sun-filter	I / O	815 - 3200	910 - 4523	1061 - 10146	300 - 4333

Fabric widths are determined by fabric thickness. Due to variations in thickness, the maximum width may not always be achievable. In such cases, we will offer an alternative colour and fabric type. All screens over 5910mm will require frame joiners at the head and sill. The dimensions are a guide only and may change depending on the options selected. Confirmation should always be sought from a Centor Screen dealer with access to the Centor Production System (CPS).