

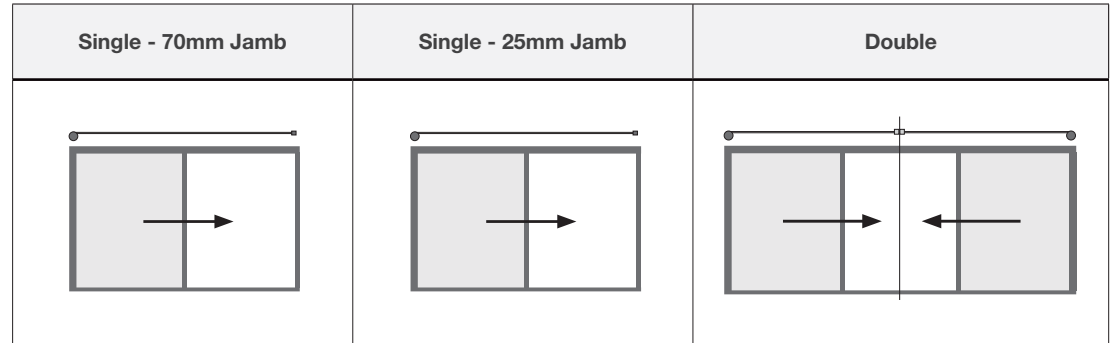
S2

Metric

FRAME SIZE LIMITS

Single | Double

centor®



Sill (mm)	Frame Height (mm)	Frame Width (mm)		
19	756 - 2000	670 - 1370	625 - 1345	670 - 2550
	2001 - 3200	790 - 1370	745 - 1345	790 - 2550
25	763 - 2000	670 - 2070	625 - 2025	670 - 4000
	2001 - 3200	790 - 2070	745 - 2025	790 - 4000
	3201 - 3700	850 - 1345	805 - 1300	850 - 2550
	3701 - 4000	850 - 1020	805 - 975	850 - 1900



S2

Metric

FRAME SIZE LIMITS

Jambless

centor®

	Configuration	Sill (mm)	Frame Height (mm)	Frame Width (mm)	Screen Stop Position
Jambless (Full width)		25	763 - 3200	615 - 2014	1930
			3201 - 3700	783 - 1289	1205
			3701 - 4000	783 - 964	880
Jambless (Custom)		25	763 - 3200	603 - 3933	1930
			3201 - 3700	723 - 3933	1205
			3701 - 4000	783 - 3933	880



S2

Metric

FRAME SIZE LIMITS

XO or OX

centor®

	Configuration	Sill (mm)	Frame Height (mm)	Frame Width (mm)	Screen Stop Position
XO or OX - 25mm Jamb		19	756 - 2000	625 - 2505	1930
			2001 - 3200	745 - 2505	1930
		25	763 - 2000	625 - 3955	1930
			2001 - 3200	745 - 3955	1205
			3201 - 4000	805 - 3955	880
		XO or OX - 70mm Jamb		19	756 - 2000
2001 - 3200	790 - 2550				1930
25	763 - 2000			670 - 4000	1930
	2001 - 3200			790 - 4000	1205
	3201 - 4000			850 - 4000	880